



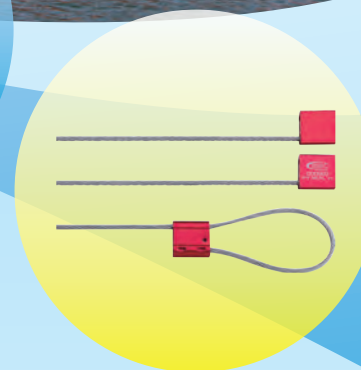

物流安全领域的优秀供应商！朴一封条，安全可靠！

更多产品详情请登陆：
www.pyqgzp.com
www.chinasecurityseals.com

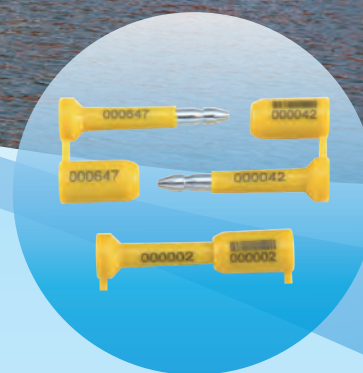

温州朴一轻工制品有限公司

WENZHOU PUYI LIGHT INDUSTRY PRODUCTS CO., LTD.

地址: 浙江省温州市鹿城轻工业园区西山头78号

电话: 0577-56893666 传真: 0577-56877566 手机: 15858005695

QQ: 1911518403 邮箱: pysale01@pyqgzp.com

ADD: NO.78,XISHANGTOU, LUCHENG INDUSTRY ZONE, WENZHOU CITY,
ZHEJIANG PROVINCE,CHINA.325019

Tel: 0086-577-56893666 FAX: 0086-577-56877566 Mob: 0086-15858005695

QQ:1911518403 E-mail: pysale01@pyqgzp.com



www.pyqgzp.com
www.chinasecurityseals.com

WENZHOU PUYI LIGHT INDUSTRY PRODUCTS CO., LTD.

温州朴一轻工制品有限公司



公司本着“诚信、品质、创新、发展”的经营理念，热忱欢迎社会各界同仁前来洽谈业务！

Company of "integrity, quality, innovation and development"
business philosophy, warmly welcome you for good business
relationship



证书展示



Production Workshop

生产车间

WENZHOU
PUYI LIGHT
INDUSTRY PRODUCTS
CO., LTD.

温州朴一轻工制品有限公司

高质量，守信用，重服务
Integrity, quality, Innovation and Development



装配车间 Assembly Workshop



注塑车间 Forming Workshop




研发 Research and development



注塑车间 Forming Workshop





测试 Test

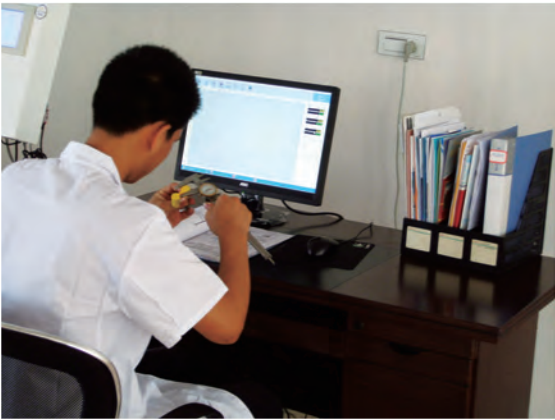

检测 Detection

Model No.: PY-6001

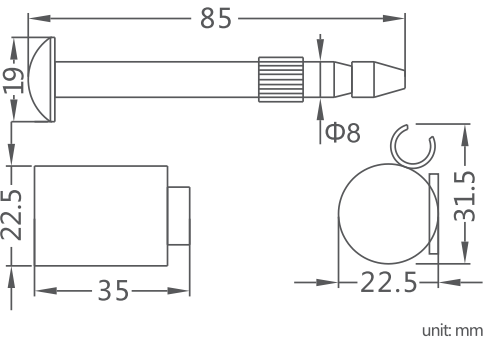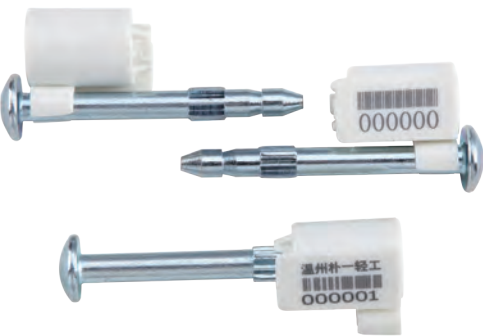

产品描述

符合最新ISO/PAS17712:2013标准要求, 铁杆、铁套均用高质量的低碳钢, 外包ABS注塑, 最先进的 "防转" 功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色, 分体式设计, 可提供直线型和弯形两种铁杆。

技术参数

铁杆直径: 8mm
铁杆柄直径: 19mm
注塑后铁套直径: 22.5mm
铁杆长度: 85mm
拉力强度: >17KN

产品应用

集装箱远洋运输, 各种国际标准集装箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 20/19kg

Description

Confirm to new edition of iso/pas17712:2013 standard requirement, both bolt and cylinder are made of high quality low-carbon steel, advanced anti rotation function, to keep the locked seal can not be rotated out, company name or logo and sequential numbers can be laser printed on seals, bar code is available, various colors are available, split type design, straight and curved bolt is available.

Technical parameters

Bolt diameter: 8mm
Bolt cap diameter: 19mm
Bolt length: 85mm
Cylinder diameter: 18mm
ABS coated cylinder diameter: 22.5mm
ABS coated cylinder length: 35mm
Tensile strength: >17KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.


Package

Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 20KG
N.W.: 19KG

Model No.: PY-6002

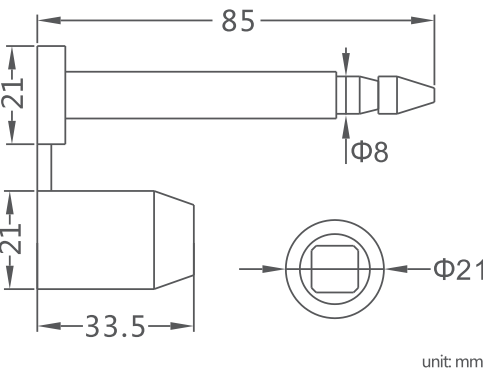

产品描述

符合最新ISO/PAS17712:2013标准要求, 铁杆、铁套均用高质量的低碳, 外包ABS注塑, 具有 "防转" 功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色。

技术参数

铁杆直径: 8mm
铁套直径: 18mm
注塑后铁杆铁帽直径: 21mm
铁套直径: 21mm
铁杆长度: 85mm
铁套高度: 33.5mm
拉力强度: >16KN

产品应用

集装箱远洋运输, 各种国际标准集装箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 17/16kg

Description

Confirm to new edition of iso/pas17712:2013 standard requirement, bolt diameter is 8mm, cylinder diameter is 18mm, outer abs plastic coated, this type seals is applied to container ocean shipping, to all kinds of iso containers, both bolt and cylinder are made of high quality low-carbon steel,featured in anti-spin, to keep the locked seal can not be rotated out,company name or logo and sequential numbers can be laser printed on seals, bar code is available,various colors are available.

Technical parameters

Both bolt and cylinder is made of high quality low-carbon steel.
Bolt diameter: 8mm
Cylinder diameter: 18mm
ABS coated bolt cap diameter: 21mm
Coated cylinder diameter: 21mm
ABS coated bolt total length: 85mm
ABS coated cylinder length: 33.5mm
Tensile strength: >16KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.

Package


Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 17KG
N.W.: 16KG

Tel: 0086-577-56893666

Model No.: PY-6005

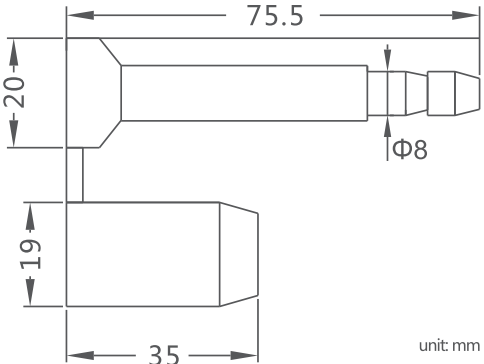

产品描述

符合最新ISO/PAS17712标准要求, 铁杆、铁套均用高质量的低碳钢, 外包ABS注塑, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色。

技术参数

铁杆、铁套均用高质量的低碳钢制作
铁杆直径: 8mm
铁套直径: 15mm
注塑后铁杆铁帽直径: 20mm
铁套直径: 19mm
铁杆总长度: 75.5mm
铁套高度: 35mm
拉力强度: >15KN

产品应用

集装箱远洋运输, 各种国际标准集装箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 45×30×15cm
毛/净重: 16/15kg

Description

Confirm to iso/pas17712 standard requirement, bolt diameter is 8mm, cylinder diameter is 15mm, outer abs plastic coated,both bolt and cylinder are made of high quality low-carbon steel, company name or logo and sequential numbers can be laser printed on seals, bar code is available,various colors are available.

Technical parameters

Both bolt and cylinder is made of high quality low-carbon steel.
Bolt diameter: 8mm
Cylinder diameter: 15mm
Coated bolt cap diameter: 20mm
Coated cylinder diameter: 19mm
ABS coated bolt total length: 75.5mm
Cylinder length: 35mm
Tensile strength: >15KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.



Package

Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 45×30×15cm

Weight

G.W.: 16KG
N.W.: 15KG

Model No.: PY-6006

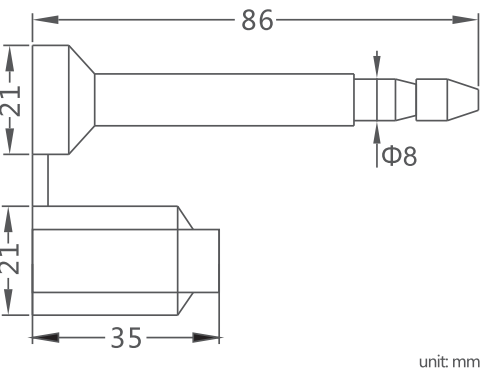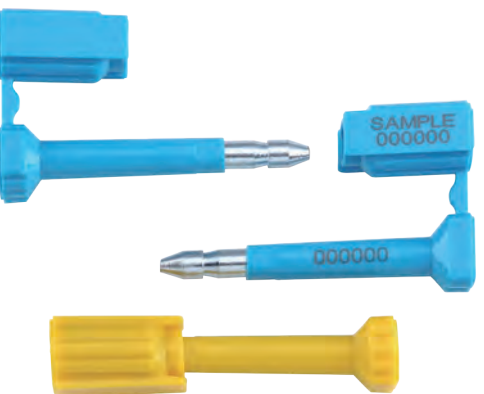

产品描述

符合最新ISO/PAS17712:2013标准要求, 铁杆、铁套均用高质量的低碳钢, 外包ABS注塑, 最具有 "防转" 功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色。

技术参数

铁杆、铁套均用高质量的低碳钢制作
铁杆直径: 8mm
铁套直径: 15mm
注塑后铁杆铁帽直径: 21mm
铁套直径: 21mm
铁杆总长度: 86mm
铁套高度: 35mm
拉力强度: >15KN

产品应用

集装箱远洋运输, 各种国际标准集装箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 17/16kg

Description

Confirm to new edition of iso/pas17712:2013 standard requirement, bolt diameter is 8mm, cylinder diameter is 18mm, outer abs plastic coated, this type seals is applied to container ocean shipping, to all kinds of iso containers, both bolt and cylinder are made of high quality low-carbon steel,featured in anti-spin, to keep the locked seal can not be rotated out,company name or logo and sequential numbers can be laser printed on seals, bar code is available,various colors are available.

Technical parameters

Bolt diameter: 8mm
Cylinder diameter: 15mm
Coated bolt cap diameter: 21mm
Coated cylinder diameter: 21mm
ABS coated bolt length: 86mm
Cylinder length: 35mm
Tensile strength: >15KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.


Package

Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 17KG
N.W.: 16KG

Model No.: PY-6007

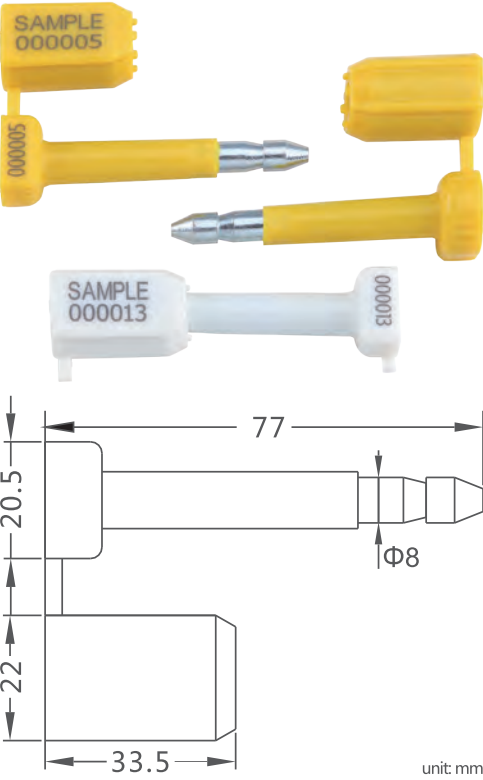

产品描述

符合最新ISO/PAS17712:2013标准要求, 铁杆、铁套均用高质量的低碳, 外包ABS注塑, 具有 "防转" 功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色。

技术参数

铁杆直径: 8mm
铁套直径: 18mm
注塑后铁杆铁帽直径: 20.5mm
铁套直径: 22mm
铁杆长度: 77mm
铁套高度: 33.5mm
拉力强度: >16KN

产品应用

集装箱远洋运输, 各种国际标准集装, 箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 45×30×15cm
毛/净重: 21/20kg

Description

Confirm to new edition of iso/pas17712:2013 standard requirement, both bolt and cylinder is made of high quality low-carbon steel, outer abs plastic coated, featured in anti-spin, to keep the locked seal can not be rotated out, company name or logo and sequential numbers can be laser printed on seals, bar code is available,various colors are available.

Technical parameters

Bolt diameter: 8mm
Cylinder diameter: 18mm
ABS coated bolt cap diameter: 20.5mm
Coated cylinder diameter: 22mm
ABS coated bolt length: 77mm
ABS coated cylinder length: 33.5mm
Tensile strength: >16KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.


Package

Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 45×30×15cm

Weight

G.W.: 21KG
N.W.: 20KG

Model No.: PY-6008

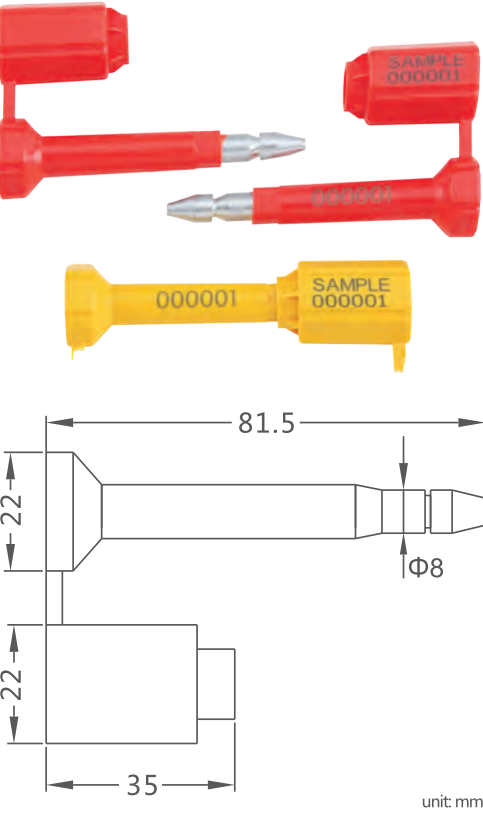

产品描述

符合最新ISO/PAS17712:2013标准要求, 铁杆、铁套均用高质量的低碳, 外包ABS注塑, 具有 "防转" 功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色。

技术参数

铁杆直径: 8mm
铁套直径: 18mm
注塑后铁杆铁帽直径: 22mm
铁套直径: 22mm
铁杆长度: 81.5mm
铁套高度: 35mm
拉力强度: >16KN

产品应用

集装箱远洋运输, 各种国际标准集装, 箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 20/19kg

Description

Confirm to new edition of iso/pas17712:2013 standard requirement, featured in anti-spin, to keep the locked seal can not be rotated out,both bolt and cylinder is made of high quality low-carbon steel, company name or logo and sequential numbers can be laser printed on seals, bar code is available,various colors are available.

Technical parameters

Bolt diameter: 8mm
Bolt cap diameter: 18mm
Cylinder diameter: 18mm
ABS coated bolt cap diameter: 22mm
Coated cylinder diameter: 22mm
ABS coated bolt length: 81.5mm
ABS coated cylinder length: 35mm
Tensile strength: >16KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.

Package


Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 20KG
N.W.: 19KG

Tel: 0086-577-56893666

Model No.: PY-6009

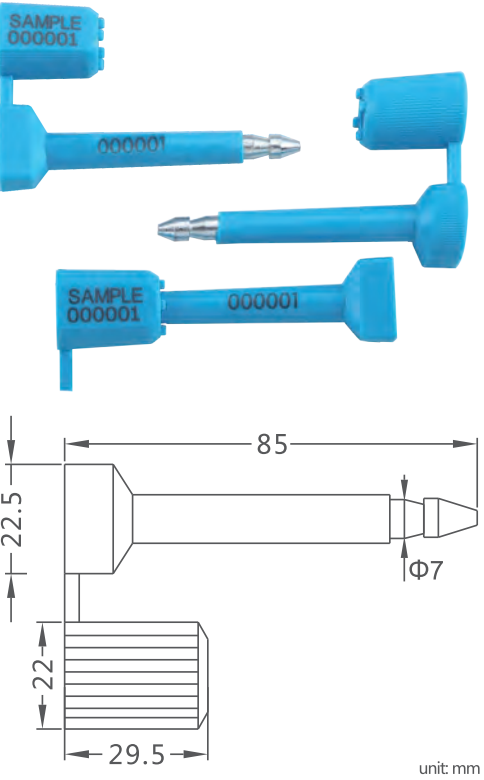

产品描述

符合最新ISO/PAS17712标准要求, 铁杆、铁套均用高质量的低碳钢, 外包ABS注塑, 具有 "防转" 功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色。

技术参数

铁杆直径: 7mm
铁套直径: 15mm
注塑后铁杆铁帽直径: 22.5mm
铁套直径: 22mm
铁杆长度: 85mm
铁套高度: 29.5mm
拉力强度: >13KN

产品应用

集装箱远洋运输, 各种国际标准集装, 箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 19/18kg

Description

Confirm to new edition of iso/pas17712standard requirement, both bolt and cylinder are made of high quality low-carbon steel, featured in anti-spin, to keep the locked seal can not be rotated out, company name or logo and sequential numbers can be laser printed on seals, bar code is available,various colors are available.

Technical parameters

Bolt diameter: 7mm
Cylinder diameter: 15mm
ABS coated bolt cap diameter: 22.5mm
Coated cylinder diameter: 22mm
ABS coated bolt total length: 85mm
Cylinder length: 29.5mm
Tensile strength: >13KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.


Package

Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 19KG
N.W.: 18KG

Model No.: PY-6010

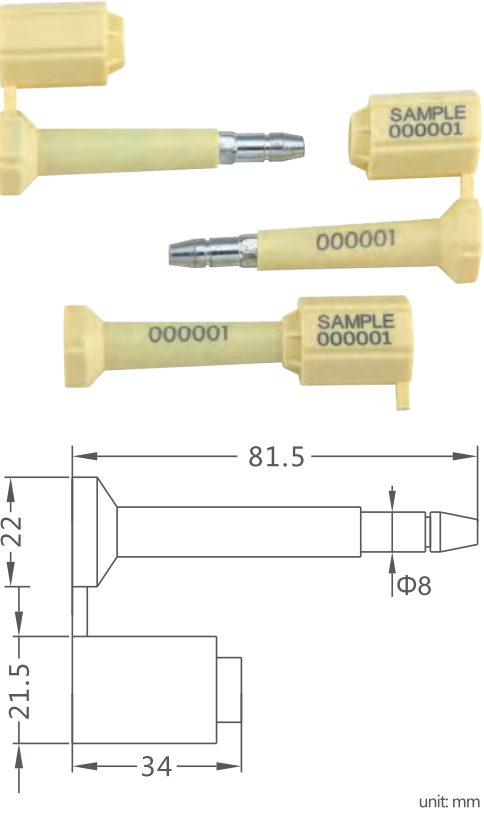

产品描述

符合最新ISO/PAS17712:2013标准要求, 铁杆、铁套均用高质量的低碳钢, 外包ABS注塑, 具有最先进的 "防转" 功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可印条形码, 可提供多种颜色。

技术参数

铁杆直径: 8mm
铁套直径: 18mm
注塑后铁杆铁帽直径: 22mm
铁套直径: 21.5mm
铁杆长度: 81.5mm
铁套高度: 34mm
拉力强度: >17KN

产品应用

集装箱远洋运输, 各种国际标准集装, 箱厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 21/20kg

Description

Confirm to new edition of ISO/PAS17712:2013 standard requirement, Both bolt and cylinder are made of high quality low-carbon steel, Outer ABS plastic coated, Advanced anti rotation function(hexagon shape in cylinder and bolt), to keep the locked seal can not be rotated out, Company name or LOGO and sequential numbers can be laser printed on seals,Bar code is available, Various colors are available.

Technical parameters

Bolt diameter: 8mm
Bolt cap diameter: 18mm
ABS coated bolt capdiameter: 22mm
Cylinder diameter: 18mm
ABS coated cylinder diameter: 21.5mm
ABS coated cylinder length: 34mm
ABS coated bolt length: 81.5mm
Tensile strength: >17KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.



Package

Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 21KG
N.W.: 20KG

Model No.: PY-6011

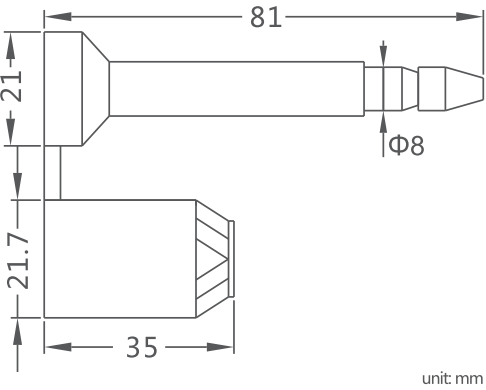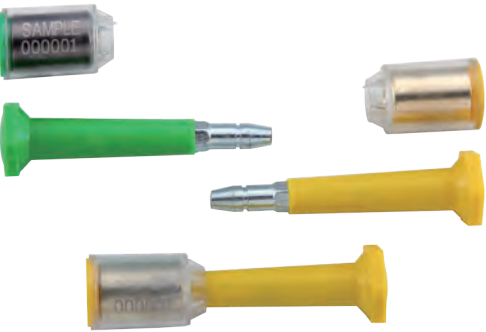

产品描述

符合最新ISO/PAS17712:2013标准要求, 铁杆、铁套均用高质量的低碳钢, 外包ABS注塑, 具有最先进的"防转"功能, 保证锁紧后不会被高速旋转拉出, 激光印制公司名称, LOGO和序列号, 可提供多种颜色, 分体式设计。

技术参数

铁杆直径: 8mm
铁套直径: 18mm
注塑后铁杆铁帽直径: 21mm
铁套直径: 21.7mm
铁杆长度: 81mm
铁套高度: 35mm
拉力强度: >17KN

产品应用

集装箱远洋运输, 各种国际标准集装箱, 厢式货车, 卡车, 货运火车箱。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 21/20kg

Description

Confirm to new edition of ISO/PAS17712:2013 standard requirement, bolt diameter is 8mm, cylinder diameter is 18mm, outer ABS plastic coated and transparent ABS plastic coated, both bolt and cylinder are made of high quality low-carbon steel, advanced anti rotation function (hexagon shape in cylinder and bolt), to keep the locked seal can not be rotated out, company name or LOGO and sequential numbers can be laser printed on seals, bar code is available, various colors are available.

Technical parameters

Bolt diameter: 8mm
Bolt cap diameter: 18mm
Cylinder diameter: 18mm
ABS coated cylinder diameter: 21.7mm
ABS coated cylinder length: 35mm
ABS coated bolt length: 81mm
Tensile strength: >17KN

Application

Ocean containers shipping, all kinds of ISO containers van trucks, tank trucks.

Package



Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 21KG
N.W.: 20KG

Tel: 0086-577-56893666

Model No.: PY-7100

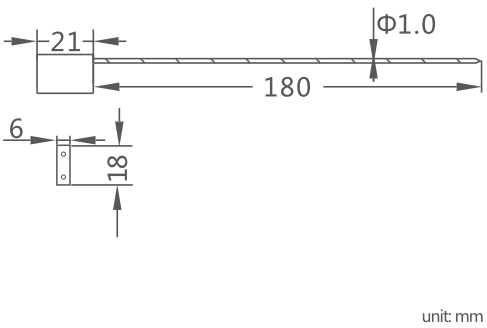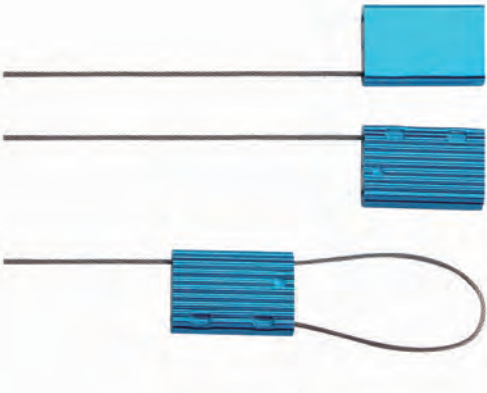

产品描述

内部为锌件压铸, 铝合金锁体, 采用微型不锈钢钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝绳直径: 1.0mm
锁体尺寸: 21×18×6mm
默认钢丝长度: 180mm, 其他钢丝长度可供客户选择
拉力强度: >2KN

产品应用

物流运输, 箱式包装, 罐体包装, 水电仪表等等。

包装方式

包装数量: 1500条/箱
包装尺寸: 36×26×15cm
毛/净重: 14.6 /13.8kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, stainless steel wire, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 21×18×6mm
Cable diameter: 1.0mm
Default cable length: 180mm
Any other length cable is available as per requirements
Tensile strength: >2KN

Application

Logistics transportation, box packing, meter box and distribution cabinet etc.


Package

Packing: 1500pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 14.6KG
N.W.: 13.8KG

Model No.: PY-6012

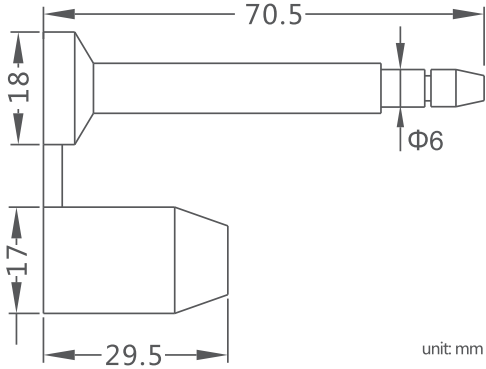

产品描述

铁杆、铁套均用高质量的低碳钢, 外包ABS注塑, 有"防转"功能, 保证锁紧后不会被高速旋转拉出, 可印条形码, 可提供多种颜色。

技术参数

铁杆直径: 6mm
铁套直径: 13mm
注塑后铁杆铁帽直径: 18mm
铁套直径: 17mm
铁杆长度: 70.5mm
铁套高度: 29.5mm
拉力强度: >5KN

产品应用

主要应用于配电柜, 仪表表柜等小孔径表箱的施封。

包装方式

包装数量: 10个/盒 250个/箱
包装尺寸: 25×37×11cm
毛/净重: 9.5/9kg

Description

Both bolt and cylinder are made of high quality low-carbon steel, featured in anti-spin, to keep the locked seal can not be rotated out, company name or logo and sequential numbers can be laser printed on seals, bar code is available, various colors are available.

Technical parameters

Bolt diameter: 6mm
Cylinder diameter: 13 mm
ABS coated bolt cap diameter: 18mm
ABS coated cylinder length: 17mm
ABS coated bolt length: 70.5mm
ABS coated cylinder length: 29.5mm
Tensile strength: >5KN

Application

Meter box, electric power distribution cabinet.



Package

Packing: 10pcs/box, 250pcs/ctn
Carton Dimension: 25×37×11cm

Weight

G.W.: 9.5KG
N.W.: 9KG

Model No.: PY-7180

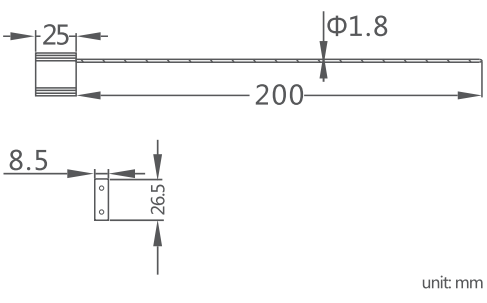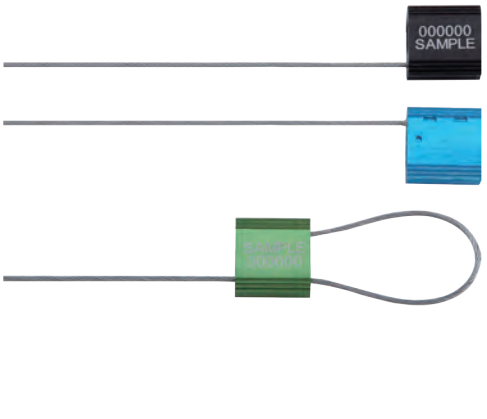

产品描述

内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝直径: 1.8mm
锁体尺寸: 25×26.5×8.5mm
默认钢丝长度: 200mm, 其他钢丝长度可供客户选择
拉力强度: >5KN

产品应用

集装箱运输、物流运输、厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 1000条/箱
包装尺寸: 36×26×15cm
毛/净重: 17.5 /17kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 25×26.5×8.5mm
Cable diameter: 1.8mm
Default cable length: 200mm
Any other length cable is available as per requirements
Tensile strength: >5KN

Application

Containers ocean shipping, Logistics transportation Van trucks, trucks, tank trucks, railway trucks, etc.



Package

Packing: 1000pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 17.5KG
N.W.: 17KG

Model No.: PY-7181

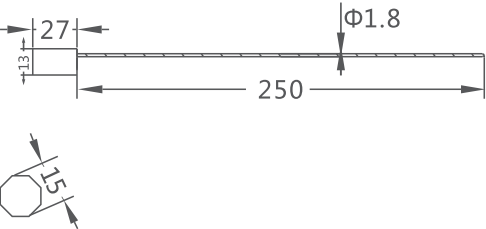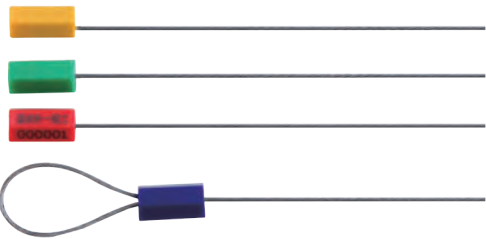

unit: mm

产品描述

内部为锌件压铸, 锌件外包ABS注塑, 采用半松散镀锌钢丝绳, 拉紧型锁式结构, 操作简单, 可激光或烫印公司LOGO和序列号, 多种颜色可提供, 或客户指定颜色。

产品参数

钢丝直径: 1.8mm
默认钢丝长度: 250mm, 其他钢丝长度可供客户选择
拉力强度: > 1.5KN

产品应用

集装箱运输, 内陆物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 1000条/箱
包装尺寸: 36×26×15cm
毛/净重: 17 /16.5kg

Description

Inner parts is made by zinc casting, outside with abs injection, galvanized wire cable and pull tight locking mechanism, easy to lock, company logo and serial numbers can be printed on the seal body by laser or hot stamping, various colors are available, or do as per special requirements.

Technical parameters

Cable diameter: 1.8mm
Default cable length: 250mm
Any other length cable is available as per requirements
Tensile strength: >1.5KN

Application

Containers ocean shipping, Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.



Package

Packing: 1000pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 17KG
N.W.: 16.5KG

Model No.: PY-7182

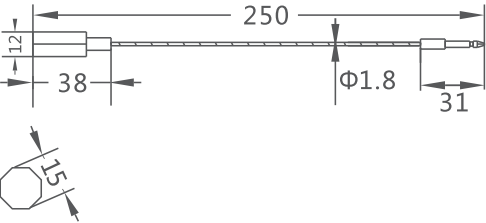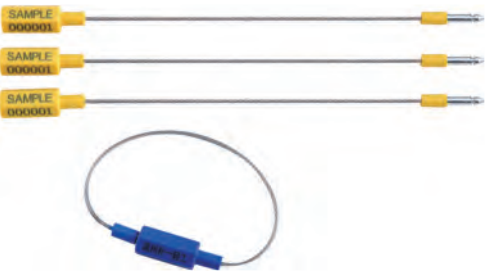

unit: mm

产品描述

内部为优质低碳钢部件, 外包ABS注塑, 采用半松散镀锌钢丝绳, 对插型锁式结构, 可激光或烫印公司LOGO和序列号, 多种颜色可提供, 或客户指定颜色。

产品参数

钢丝直径: 1.8mm
默认钢丝长度: 250mm, 其他钢丝长度可供客户选择
拉力强度: > 1.5KN

产品应用

集装箱运输, 物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 1000条/箱
包装尺寸: 36×26×15cm
毛/净重: 17 /16.5kg

Description

Inner parts is made by zinc casting, outside with abs injection, galvanized wire cable and inserted type locking mechanism, company logo and serial numbers can be printed on the seal body by laser or hot stamping, various colors are available, or do as per special requirements.

Technical parameters

Cable diameter: 1.8mm
Default cable length: 250mm
Any other length cable is available as per requirements
Tensile strength: > 1.5KN

Application

Containers ocean shipping, Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.

Package



Packing: 1000pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 17KG
N.W.: 16.5KG

Tel: 0086-577-56893666

Model No.: PY-7184

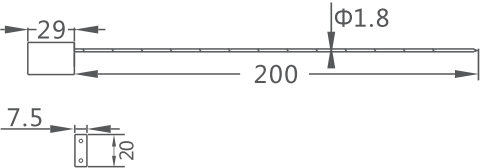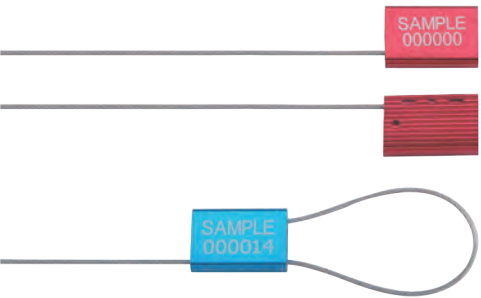

unit: mm

产品描述

内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半松散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝直径: 1.8mm
锁体尺寸: 29×20×7.5mm
默认钢丝长度: 200mm, 其他钢丝长度可供客户选择
拉力强度: > 5KN

产品应用

集装箱运输, 物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 1000条/箱
包装尺寸: 36×26×15cm
毛/净重: 13.8 /13kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 29×20×7.5mm
Cable diameter: 1.8mm
Default cable length: 200mm
Any other length cable is available as per requirements
Tensile strength: > 5KN

Application

Containers ocean shipping
Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.



Package

Packing: 1000pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 13.8KG
N.W.: 13KG

Model No.: PY-7200

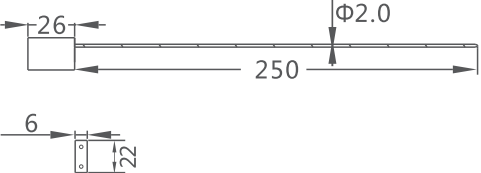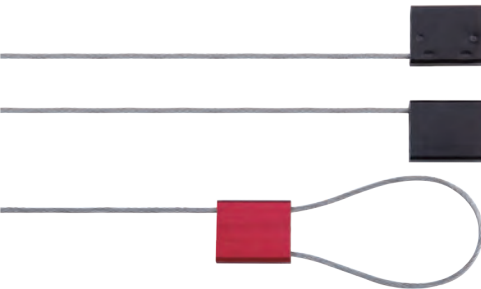

unit: mm

产品描述

内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半松散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 也可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝直径: 2.0mm
锁体尺寸: 26×22×6mm
默认钢丝长度: 250mm, 其他钢丝长度可供客户选择
拉力强度: > 5KN

产品应用

集装箱运输
物流运输
厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 1000条/箱
包装尺寸: 36×26×15cm
毛/净重: 16 /15.5kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 26×22×6mm
Cable diameter: 2.0mm
Default cable length: 250mm
Any other length cable is available as per requirements
Tensile strength: >5KN

Application

Containers ocean shipping, Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.



Package

Packing: 1000pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 16KG
N.W.: 15.5KG

Model No.: PY-7250

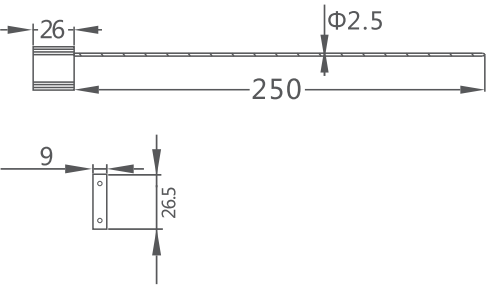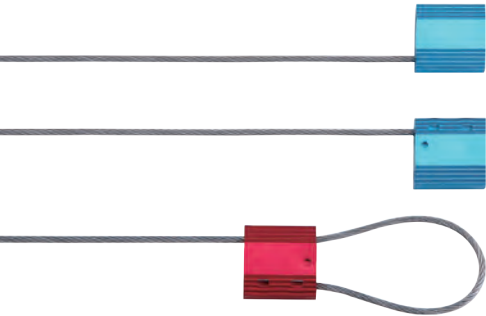

unit: mm

产品描述

内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半松散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝直径: 2.5mm
锁体尺寸: 26×26.5×9mm
默认钢丝长度: 250mm, 其他钢丝长度可供客户选择
拉力强度: > 5KN

产品应用

集装箱运输, 物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 1000条/箱
包装尺寸: 36×26×15cm
毛/净重: 21 /20.5kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 26×26.5×9mm
Cable diameter: 2.5mm
Default cable length: 250mm
Any other length cable is available as per requirements
Tensile strength: >5KN

Application

Containers ocean shipping, Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.

Package



Packing: 1000pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 21KG
N.W.: 20.5KG

Tel: 0086-577-56893666

Model No.: PY-7350

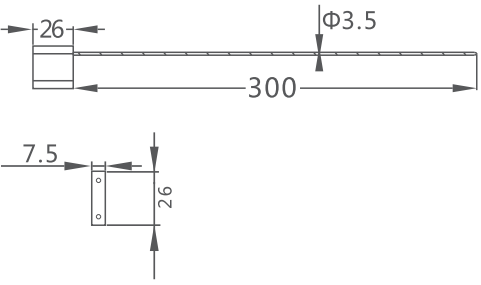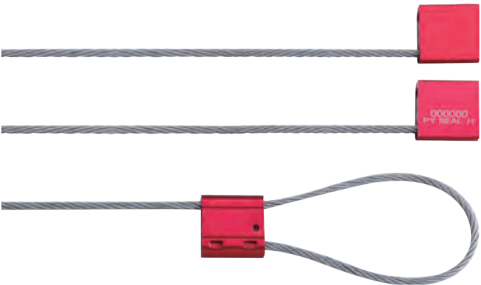

unit: mm

产品描述

内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半松散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝直径: 3.5mm
锁体尺寸: 26×26×7.5mm
默认钢丝长度: 300mm, 其他钢丝长度可供客户选择
拉力强度: > 8KN

产品应用

集装箱运输, 物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 500条/箱
包装尺寸: 36×26×15cm
毛/净重: 16.5 /16kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 26×26×7.5mm
Cable diameter: 3.5mm
Default cable length: 300mm
Any other length cable is available as per requirements
Tensile strength: >8KN

Application

Containers ocean shipping, Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.



Package

Packing: 500pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 16.5KG
N.W.: 16KG

Model No.: PY-7300

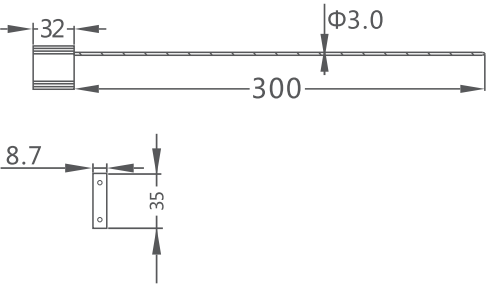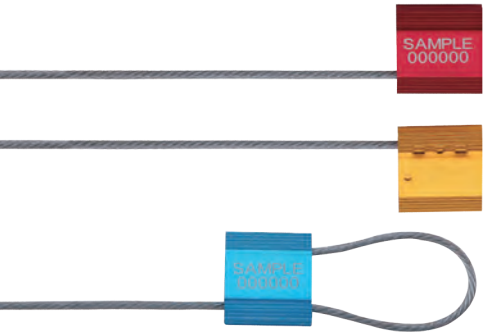

unit: mm

产品描述

内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半松散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝绳直径: 3.0mm
锁体尺寸: 32×35×8.7mm
默认钢丝长度: 300mm, 其他钢丝长度可供客户选择
拉力强度: > 7KN

产品应用

集装箱运输, 物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 500条/箱
包装尺寸: 36×26×15cm
毛/净重: 15.5 /15kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 32×35×8.7mm
Cable diameter: 3.0mm
Default cable length: 300mm
Any other length cable is available as per requirements
Tensile strength: >7KN

Application

Containers ocean shipping
Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.



Package

Packing: 500pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 15.5KG
N.W.: 15KG

Model No.: PY-7400

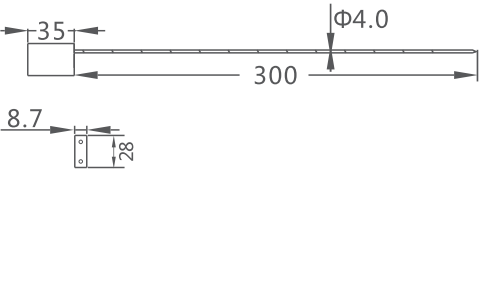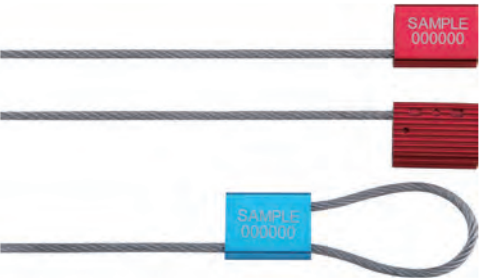

unit: mm

产品描述

内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半松散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数

钢丝直径: 4.0mm
锁体尺寸: 35×28×8.7mm
默认钢丝长度: 300mm, 其他钢丝长度可供客户选择
拉力强度: > 10KN

产品应用

集装箱运输, 内陆物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式

包装数量: 500条/箱
包装尺寸: 36×26×15cm
毛/净重: 16/15.5kg

Description

Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.

Technical parameters

Dimension of aluminum alloy: 35×28×8.7mm
Cable diameter: 4.0mm
Default cable length: 300mm
Any other length cable is available as per requirements
Tensile strength: >10KN

Application

Containers ocean shipping, Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.



Package

Packing: 500pcs/carton
Carton Dimension: 36×26×15cm

Weight

G.W.: 16KG
N.W.: 15.5KG

Model No.: PY-7500

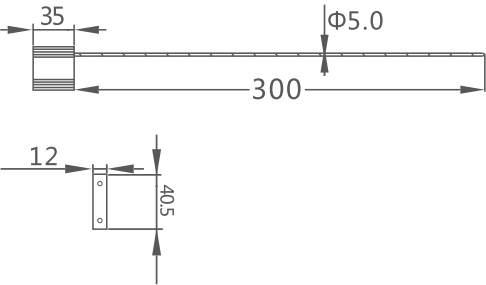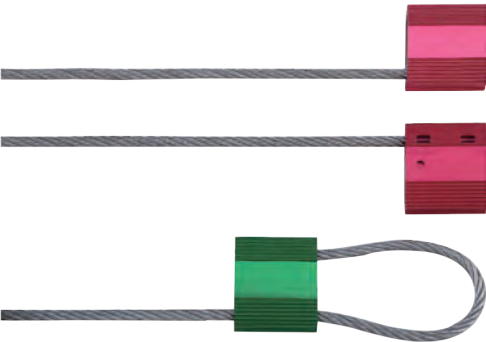

unit: mm

产品描述
内部为锌件压铸, 外壳为铝合金锁体, 采用镀锌半松散钢丝绳, 拉紧型锁式结构, 操作简单, 激光镭射公司名称或LOGO和序列号, 可激光条形码, 可选颜色有: 红、黄、蓝、绿、黑色。

产品参数
钢丝直径: 5.0mm
锁体尺寸: 35×40.5×12mm
默认钢丝长度: 300mm, 其他钢丝长度可供客户选择
拉力强度: >11.0KN

产品应用
集装箱运输, 内陆物流运输, 厢式货车、卡车、油罐车、火车厢等。

包装方式
包装数量: 250条/箱
包装尺寸: 36×26×15cm
毛/净重: 19 /18.5kg

Description
Inner parts is made by zinc casting, aluminum alloy lock body, without any plastic, galvanized wire rope, and pull tight locking mechanism, easy to lock, company name or logo and serial numbers are laser printed, bar code is available, various colors are available, such as red, blue, yellow, green, black.


Technical parameters
Dimension of aluminum alloy: 35×40.5×12mm
Cable diameter: 5.0mm
Default cable length: 300mm
Any other length cable is available as per requirements
Tensile strength: >11KN

Application
Containers ocean shipping, Logistics transportation
Van trucks, trucks, tank trucks, railway trucks, etc.

Package
Packing: 250pcs/carton
Carton Dimension: 36×26×15cm

Weight
G.W.: 19KG
N.W.: 18.5KG

Model No.: PY-2001

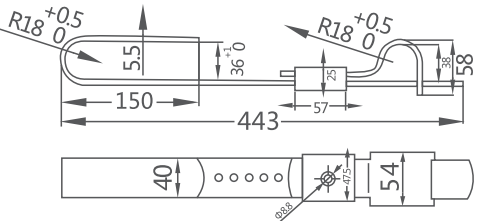

unit: mm

产品描述
重型大铁封条, 由优质A3钢和铝合金构成, 锁体可自由调节宽度, 适合各种标准宽度的门柱, 锁体可激光印制LOGO及序列号。

产品参数
锁体总长度: 443mm
宽度: 40mm
厚度: 5mm
锁扣直径: 36mm

产品应用
集装箱运输, 厢式货车、火车车厢等。

包装方式
包装数量: 10条/箱
包装尺寸: 46×25.5×12cm
毛/净重: 14.5/14kg

Description
Heavy duty barrier seal, used for high-value goods transport, for high security protection, 100% steel construction lock body, designed by two movable buckle, More convenient to use, lock holes for customer choice, available for different space of the door tubes.

Technical parameters
Total body length: 443mm
Width: 40mm
Ckness: 5mm
Breaking force: more than 3.5 ton


Application
Ocean containers shipping, all kinds of ISO containers.

Package
Packing: 10units/ctn
Carton Dimension: 46×25.5×12cm

Weight
G.W.: 14.5KG
N.W.: 14KG

Tel: 0086-577-56893666

Model No.: PY-2002

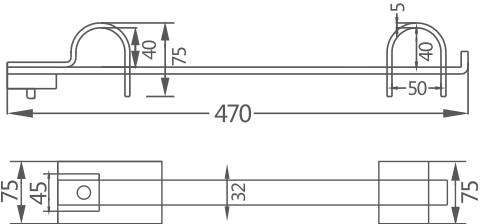

unit: mm

产品描述
重型大铁封条, 由优质A3钢和铝合金构成, 采用双活动锁扣, 可自由调节宽度, 适合各种标准宽度的门柱, 锁体可激光印制LOGO及序列号。

产品参数
锁体总长度: 470mm
宽度: 32mm
厚度: 8mm
锁扣直径: 40mm

产品应用
集装箱运输, 厢式货车、火车车厢等。

包装方式
包装数量: 10条/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 22/21.5kg

Description
Heavy duty barrier seal, used for high-value goods transport, for high security protection, 100% steel construction lock body, designed by two movable buckle, More convenient to use, lock holes for customer choice, available for different space of the door tubes.


Technical parameters
Total body length: 470mm
Width: 32mm
Ckness: 8mm
Breaking force: more than 3.5 ton

Application
Ocean containers shipping, all kinds of ISO containers.

Package
Packing: 10units/ctn
Carton Dimension: 48.5×33.5×15cm

Weight
G.W.: 22KG
N.W.: 21.5KG

Model No.: PY-2003

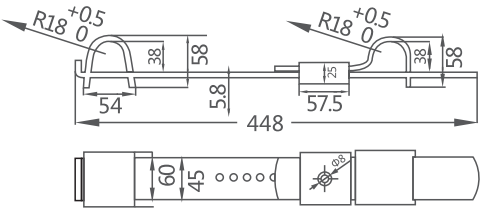

unit: mm

产品描述
重型大铁封条, 由优质A3钢和铝合金构成, 锁体可自由调节宽度, 适合各种标准宽度的门柱, 锁体可激光印制LOGO及序列号。

产品参数
锁体总长度: 448mm
宽度: 45mm
厚度: 6mm
锁扣直径: 36mm

产品应用
集装箱运输, 厢式货车、火车车厢等。

包装方式
包装数量: 10条/箱
包装尺寸: 46.5×32×9.5cm
毛/净重: 19/18.5kg

Description
Heavy duty barrier seal, used for high-value goods transport, for high security protection, 100% steel construction lock body, designed by two movable buckle, More convenient to use, lock holes for customer choice, available for different space of the door tubes.


Technical parameters
Total body length: 448mm
Width: 45mm
Ckness: 6mm
Breaking force: more than 3.5 ton

Application
Ocean containers shipping, all kinds of ISO containers.

Package
Packing: 10units/ctn
Carton Dimension: 46.5×32×9.5cm

Weight
G.W.: 19KG
N.W.: 18.5KG

Model No.: PY-2004

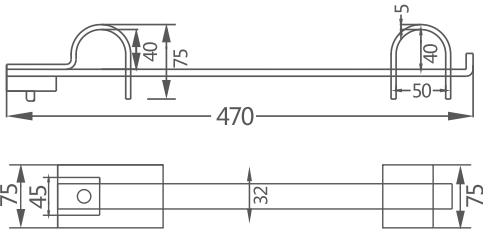

unit: mm

产品描述

双保险重型大铁封条, 材质为优质A3钢板及钢丝绳（同时锁住门柱及门把手，双重保险，安全性能更高），锁体可自由调节宽度, 适合各种标准宽度的门柱, 锁体可激光印制LOGO及序列号。

产品参数

锁体总长度: 470mm
宽度: 32mm
厚度: 8mm
锁扣直径: 40mm

钢丝绳长度: 450mm
钢丝绳直径: 5.0mm

产品应用

集装箱运输, 厢式货车、火车车厢等。

包装方式

包装数量: 10条/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 22/21.5kg

Description

Double lock heavy duty barrier seal,used for high-value goods transport, for high security protection,100% steel construction lock body,designed by two movable buckle, more convenient to use,lock holes for customer choice, available for different space of the door tubes.

Technical parameters

Total body length: 470mm
Width: 32mm
Ckness: 8mm
Breaking force: more than 3.5 ton

Application

Ocean containers shipping, all kinds of ISO containers.


Package

Packing: 10units/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 22KG
N.W.: 21.5KG

Model No.: PY-2008

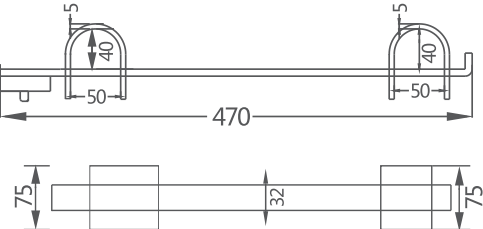

unit: mm

产品描述

重型大铁封条, 由优质A3钢板, 可重复使用, 只需更换专用锁头, 成本低廉! 锁体可自由调节宽度, 适合各种标准宽度的门柱, 锁体可激光印制LOGO及序列号。

产品参数

锁体总长度: 470mm
宽度: 32mm
厚度: 8mm
锁扣直径: 40mm

包装方式

包装数量: 10条/箱
包装尺寸: 48.5×33.5×15cm
毛/净重: 23/22.5kg

Description

Heavy duty barrier seal, used for high-value goods transport, for high security protection, **recyclable designed** by replace a high security bolt seal, designed by two movable buckle, more convenient to use,lock holes for customer choice, available for different space of the door tubes.

Technical parameters

Total body length: 470mm
Width: 32mm
Ckness: 8mm
Breaking force: more than 3.5 ton

Application

Ocean containers shipping, all kinds of ISO containers.

Package

Packing: 10units/ctn
Carton Dimension: 48.5×33.5×15cm

Weight

G.W.: 23KG
N.W.: 22.5KG



物流安全领域的优秀供应商！朴一封条，安全可靠！

更多产品详情请登陆：

www.pyqgzp.com
www.chinasecurityseals.com